ICP641620PA-01

Rechargeable Lithium Ion Polymer Battery Pack 3.7 V
Safety Circuit, **IEC62133 certified**

Specifications

Renata Type	ICP641620
IEC Designation	ICP071622
Part Number	100695
Contact Method:	Wire AWG 30
Safety Circuit	Yes
Nominal Voltage	3.7 V
Nominal Capacity	165 mAh
Minimum Capacity	155 mAh (0.2C cut off 3.0 V at 20°C)
Internal Impedance	< 370 mΩ / 30% SOC
Thickness (t)	Max 6.9 mm
Lenghth (l)	Max 21.5 mm
Width (w)	Max 16.2 mm
Weight	~ 4.0 g
Charging Characteristic	CC/CV – Constant Current / Constant Voltage
Voltage	4.2 V CV
Current Normal	0.5 C CC – 82.5 mA
Max. Charging Current	1.0 C CC – 165 mA
Temperature at Charging	0 °C …. 45 °C
Discharge Characteristic	
Cut off Voltage	3.0 V
Max discharge Current	2.0 C – 330 mA (for non continues discharge) 1.0 C – 165 mA (for continues discharge)
Temperature during Discharge	-20 °C … 60 °C
Cycle Life at Room Temperature	> 80% of minimum capacity after 500 cycles (0.5 C charge, 0.5 C discharge)
Storage Temperature	-20 °C … 45 °C (0 °C … 30 °C recommended in case of storage for more than 3 months)

Dimensions

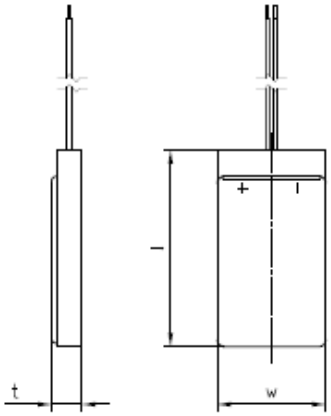

Rev. ICP641620PA V03 06/2023

Renata SA
CH-4452 Itingen/Switzerland
Tel. +41 (0)61 975 75 75
Fax. +41 (0)61 975 75 95
sales@renata.com
www.renata.com